


60

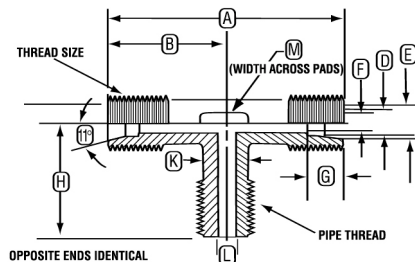

SPECIFICATIONS

| JACO Part No. | Tube O.D. | Pipe Thd. | Thread | A | B | D | E | F | G | H | K | L | M |
|---------------|-----------|-----------|-----------|---------|---------|-----------------|--------------|--------|--------|---------|--------|--------|--------|
| | | | | ± 1/64 | ± 1/64 | +0.005/ .010 | | ± 1/64 | ± 1/64 | ± 1/64 | ± 1/64 | ± 1/64 | ± 1/64 |
| 60-4-2 | 1/4 | 1/8 | 7/16-20 | 1-29/64 | 47/64 | .250 | .330 - .335 | .170 | 15/32 | 3/4 | 3/8 | 1/4 | 3/8 |
| 60-4-4 | 1/4 | 1/4 | 7/16-20 | 1-15/32 | 47/64 | .250 | .330 - .335 | .170 | 15/32 | 59/64 | 3/8 | 5/16 | 3/8 |
| 60-5-4 | 5/16 | 1/4 | 1/2-20 | 1-39/64 | 13/16 | .312 | .380 - .385 | .232 | 31/64 | 63/64 | 7/16 | 9/32 | 7/16 |
| 60-6-4 | 3/8 | 1/4 | 5/8-20 | 1-15/16 | 31/32 | .375 | .460 - .465 | .250 | 19/32 | 1-1/16 | 9/16 | 5/16 | 9/16 |
| 60-6-6 | 3/8 | 3/8 | 5/8-20 | 1-29/32 | 61/64 | .375 | .460 - .465 | .250 | 19/32 | 1-3/32 | 1/2 | 3/8 | 1/2 |
| 60-8-6 | 1/2 | 3/8 | 3/4-20 | 2-13/64 | 1-7/64 | .500 | .590 - .595 | .375 | 11/16 | 1-5/32 | 43/64 | 25/64 | 43/64 |
| 60-8-8 | 1/2 | 1/2 | 3/4-20 | 2-7/32 | 1-1/8 | .500 | .590 - .595 | .375 | 11/16 | 1-21/64 | 5/8 | 31/64 | 39/64 |
| 60-10-8 | 5/8 | 1/2 | 7/8-20 | 2-17/32 | 1-1/4 | .625 | .715 - .720 | .500 | 45/64 | 1-7/16 | 13/16 | 1/2 | 13/16 |
| 60-12-8 | 3/4 | 1/2 | 1-1/16-20 | 3-7/64 | 1-9/16 | .750 | .860 - .865 | .625 | 13/16 | 1-41/64 | 1-1/16 | 9/16 | 1-1/16 |
| 60-12-12 | 3/4 | 3/4 | 1-1/16-20 | 3-7/64 | 1-9/16 | .750 | .860 - .965 | .625 | 13/16 | 1-41/64 | 1-1/16 | 11/16 | 1-1/16 |
| 60-14-12 | 7/8 | 3/4 | 1-3/16-16 | 3-3/32 | 1-35/64 | .875 | .995 - 1.000 | .750 | 7/8 | 1-5/8 | 1-3/16 | 11/16 | 1-3/16 |

Parts available in: NYLON, CELCON (Acetal), POLYPROPYLENE, and KYNAR (Polyvinylidene Fluoride)

Sizes indicated are based on Celcon material (Acetal).

上海永熙机电设备有限公司
Tel: (021) 5429 6845
E-mail: info@yonshi.com.cn
www.yonshi.com.cn



永熙机电